



- builds water heaters for the future

10 Year Guarantee

OSO MINI RM5

**HOT WATER WHERE YOU NEED IT
WHEN YOU NEED IT**


**THE OSO MINI RM5 STAINLESS STEEL UNVENTED
WATER HEATER FOR POINT OF USE APPLICATIONS**

The OSO MINI RM5 incorporates a 3kW element and has a capacity of 5 litres. The MINI RM5 heats from cold in less than 6 minutes, and can be mounted vertically or horizontally.

A vertical mounting bracket is incorporated in the outer casing and a wall mounting bracket is supplied with each cylinder.




TYPICAL INSTALLATION

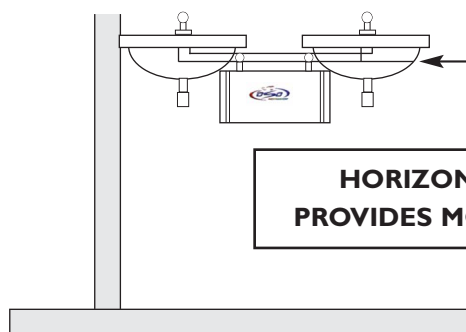

Horizontal

On the wall with supplied bracket, or on the floor.

Warning: Hot and cold water connections must be **pointing up!**

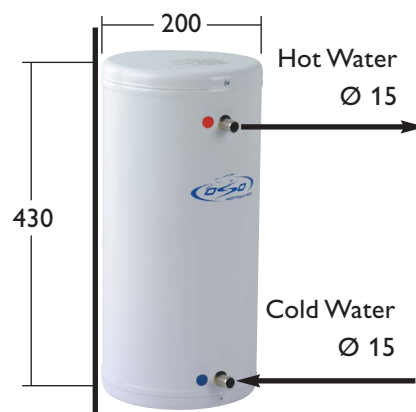

Vertical

Hanging on the wall with one solid screw or standing on the floor.

Please remember the OSO Mini RM5 will deliver hot water at temperatures above 40°C so it may be advisable to fit an in line fail safe temperature limiting valve.



- Superior smooth epoxy coated white finish to outer case.
- Easy to install.
- Factory fitted 3Kw 240V electric element.
- Factory fitted surface mounted thermostat incorporating a high limit thermostat.
- Factory fitted hard wiring between element and thermostat.
- 10 year guarantee.
- Inner vessel corrosion resistant stainless steel.
- No sacrificial anode to check or maintain.
- Inner vessel tested to 16 bar.

N.B. If a check valve is incorporated in the cold main to the OSO MINI an expansion vessel of 0.2 litres capacity must be incorporated in the cold supply and be charged to mains pressure.

The maximum operating pressure of the OSO MINI is 10 bar. The thermostat is adjustable between 30°C & 60°C. Hot outlet and cold feed connections are 15mm stainless steel.



OSO Hotwater (UK) Limited

E15 Marquis Court, Team Valley Trading Estate, Gateshead, Tyne & Wear, NE11 0RU • Tel. (0191) 482 0800 • Fax. (0191) 491 3655

Email. technical.uk@oso-hotwater.com • sales.uk@oso-hotwater.com

spareparts.uk@oso-hotwater.com • Web www.oso-hotwater.com